



MASTER SERIES

Visit www.moryinc.com for more information

THE MASTER

The Master is a fiberglass inserts module with its own floor
 You slip it on the bed of a pick up and attach it to the truck using our patented attachments requiring no bolting (Universal fit on GMC/Dodge/Ford/Toyota)

STANDARD CHARACTERISTICS



Air tight, and fully insulated fiberglass mono shell unit

Top and bottom parts of the body are joined with a composite fiberglass filling, making our unit a one piece body. No chance of water leaks, or screws / bolts getting loose etc...

Our dual rear doors are built using our newest fiberglass injection process. There is a glossy fiberglass finish on both sides.



Our Double floor construction inserts 5/8" plywood between the fiberglass as a reinforcement in case of heavy equipment falling on the floor. It also allows the user to bolt or screw any extra piece of equipment to the floor. It's covered with a heavy duty industrial strength, anti slip rubber mat



Aluminium checkered plate doorstep.



High quality drip rail over front and rear doors



Rust resistant, Marine grade heavy duty stainless hardware. Doors open to 150 degrees. With dual door hold backs our doors remain fully open, while providing free & easy access to the large rear opening of the body.



Our rear door frame is part of the entire fiberglass body which makes it extremely robust, solid & trouble free, when opening and closing the large rear doors

Exterior white gelcoat finishing UV resistant.



Patented rotative heavy duty harm attachments; a simple rotation with a 9/16" ratchet will fix the unit to the vehicle in four points.

Receivers integrated for camper style jacks



Electric junction box to allow installation of extra electric accessories plus 12 volt outlet. The junction box has fuse. When the right door opens the magnetic switched door turns the light on. This switch is rust free.



4 interior high intensity double light with own switch and one switch at the entrance.

MASTER GO

SPECIFICATIONS	8' Model	6.5' Model
Unit length available	8'	6 1/2'
Entry height	49"	49"
Interior maximum height	58"	58"
Entry width	50"	50"
Interior maximum length	100"	82"
Interior maximum width	75"	75"
Interior capacity volume	251 ft ³	204 ft ³
Weight	450 lbs	400 lbs



Rear door window are optional*

MASTER 75

Interior load length of 12'-8"

SPECIFICATIONS	8' Model	6.5' Model
Unit length available	8'	6 1/2'
Entry height	67"	67"
Interior maximum height	74"	74"
Entry width	50"	50"
Interior maximum length	152"	132"
Interior maximum width	77"	77"
Interior capacity volume	340 ft ³	276 ft ³
Weight	700 lbs	600 lbs



MASTER 80+



SPECIFICATIONS	10' Model
Unit length available	10'
Entry height	67"
Interior maximum height	80"
Entry width	50"
Interior maximum length	176"
Interior maximum width	95"
Interior capacity volume	450 ft ³
Weight	900 lbs

MASTER OPTIONS

GOLIGHT - Searchlight
Remote controlled operation

PVC Pipe holder 6" Diameter. With metal door
Length available 8' to 13'

Beacon light

HORIZONTAL Rotation Rack
goes down horizontally towards the ground
Load capacity is up to 75 pounds per side.
Optional 125 pounds capacity per side.
All you need to do is turn the handle to have your ladder ready in 15 seconds.

Standard Rack with lock

Front slider or fixe window

Keyless entry

Rear door window

Slide out floor 24" width
(other model available)

Side fiberglass door
71" x 23".
Quick access to your tools from the outside

INCLINED Rotation Rack

This rack requires half the force needed to operate the Horizontal rack.
Load capacity is up to 125 pounds per side.
This rack slides down at 45° angle.

With a 22" extension
(Master 75 & 80+)


Optic fiberglass door
19-1/2" x 10-1/2"

Slide out fiberglass door for generator


Side mounted ladder rack
(for Master 75 and 80+)

Many other options available; inverter, heater, fire extinguisher, special light, security screen, back-up mirror, etc...

INTERIOR SHELVING

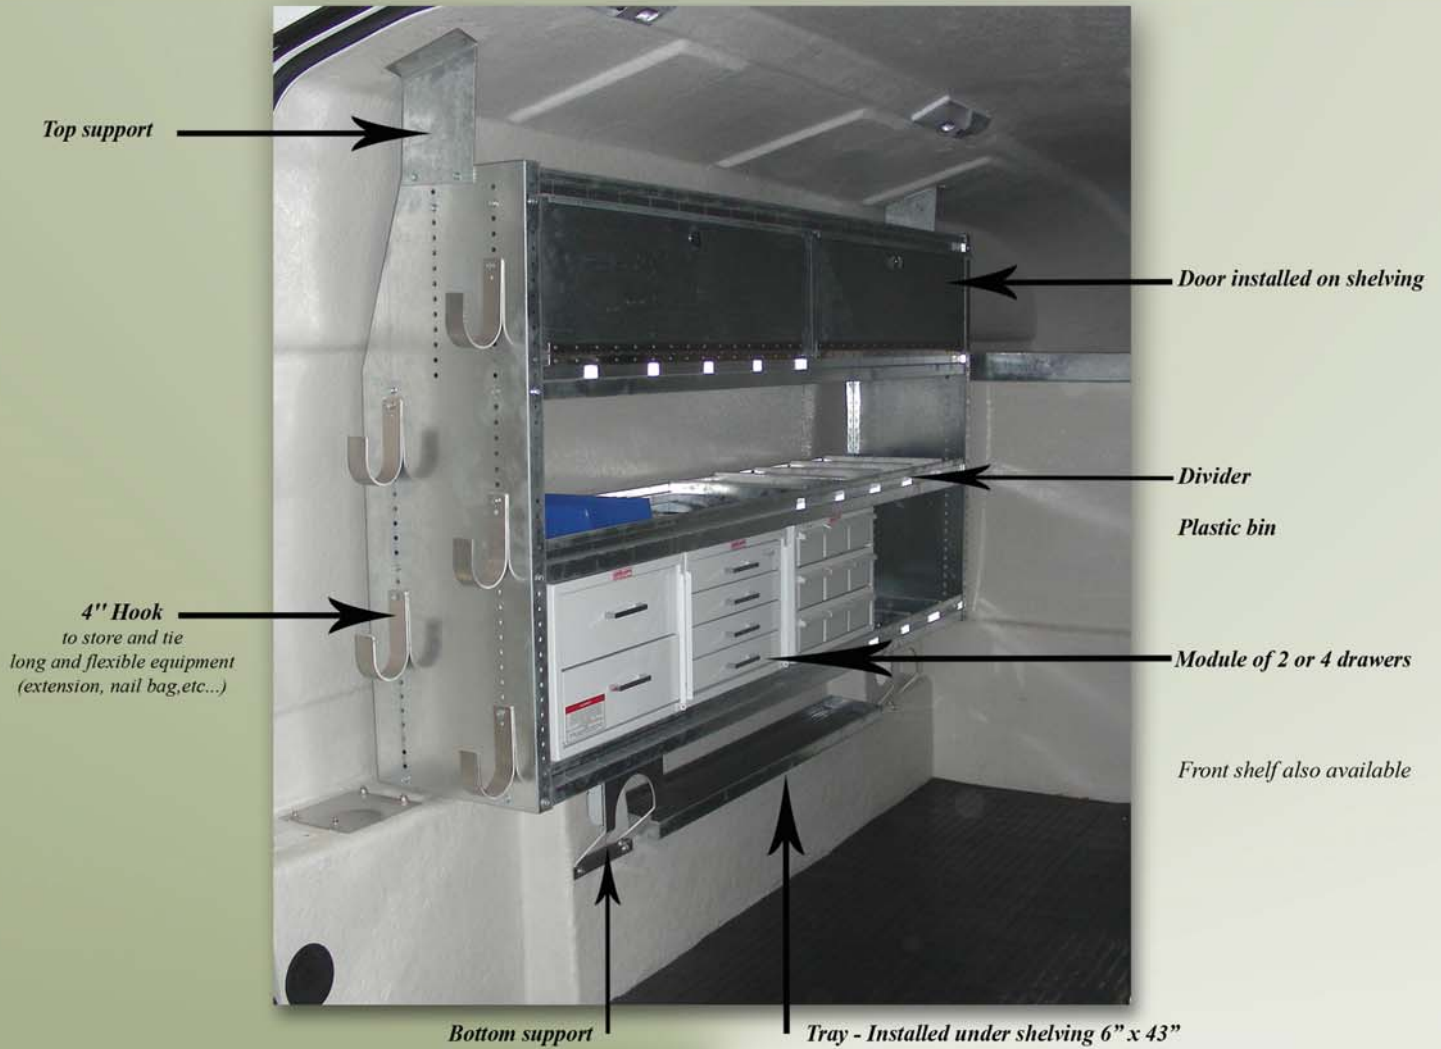

Set of 3 shelves

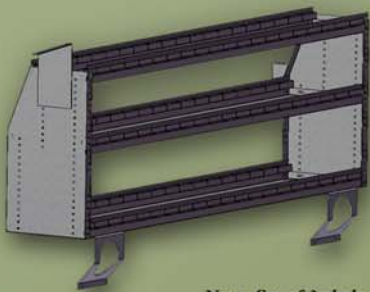


- Includes:**
- 2 shelves of 14" w (bottom)
 - 1 shelf of 10" w (top)
 - 2 top support
 - 2 bottom support

Note: Set of 3 shelves on Master 75 & Master 80+ included 3 shelves of 14" w

The standard depth of our shelves is 14"
(Possibility up to 18")


Set of 4 shelves

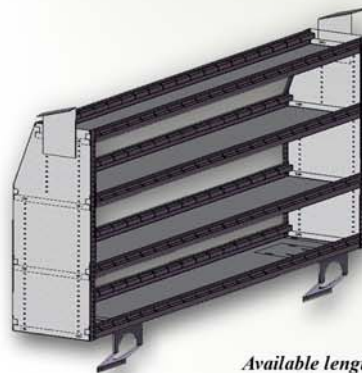

- Includes:**
- 3 shelves of 14" w (bottom)
 - 1 shelf of 10" w (top)
 - 2 top support
 - 2 bottom support

Available length of 72" (for 6,5' unit)
Available Length of 80 or 93" (for 8' unit)

Our shelving has a 3" edge with slot
ready to install divider every 4"





MASTER SERIES

*Our priority is to deliver you the most practical and productive unit.
We customize it to your needs and your budget. Custom design.*



Repair unit with generator



Mobile workshop



Refrigeration unit



Command Post



Work Bench



Emergency unit



*Transferable from one truck
to another in less than 15 minutes!*



Camper style heavy duty "Jacks" capacity of 2000 pounds



Heavy duty Jacks for dually

LIMITED LIFETIME WARRANTY

MORY inc warrants to the original purchaser of an Mory Master unit, that the body will be structurally free from defects in material or workmanship for as long as you own your Mory Master unit, installed by an authorized Mory Distributor.

This Limited lifetime warranty does not cover structural failure due to neglect, alterations, addition or modification of equipment, abuse, accident, improper handling or use. MORY inc warrants to the original purchaser of an Mory Master unit, that the exterior clearcoat/ basecoat paint will not abnormally fade or peel due to material or workmanship defect faster than the original pick-up it was installed on.

Normal wear and tear or a color match paint with 10% altering is not considered like a workmanship defect.
The gelcoat finish is covered for 60 month (five years).

All hardware components of windows & doors (handle, hinge, locks, latches) are warranty for 365 days (1 year) from the original invoice date (glass breakage is not covered).

It is «Mory inc» discretion to repair or replace the defective part(s). This warranty does not apply if the damage occurs because of abuse, accident, acts of nature, road outcome (gravel or others), an improper installation handling or use, a modification, a negligence, a normal wear, or lack of proper care and maintenance. All repairs and replacement must be approved by Mory Inc.

The warranty registration card must be returned to Mory within 30 days for this warranty to be in effect.

An original proof of purchase is required for warranty claims.

This limited warranty replace all others warranties and it excludes Mory inc from all liability for incident or consequential damages for any cause whatsoever.

OFFICIAL DISTRIBUTOR

MORY is in business since 1971

Visit www.moryinc.com for more information